No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
1			
2			

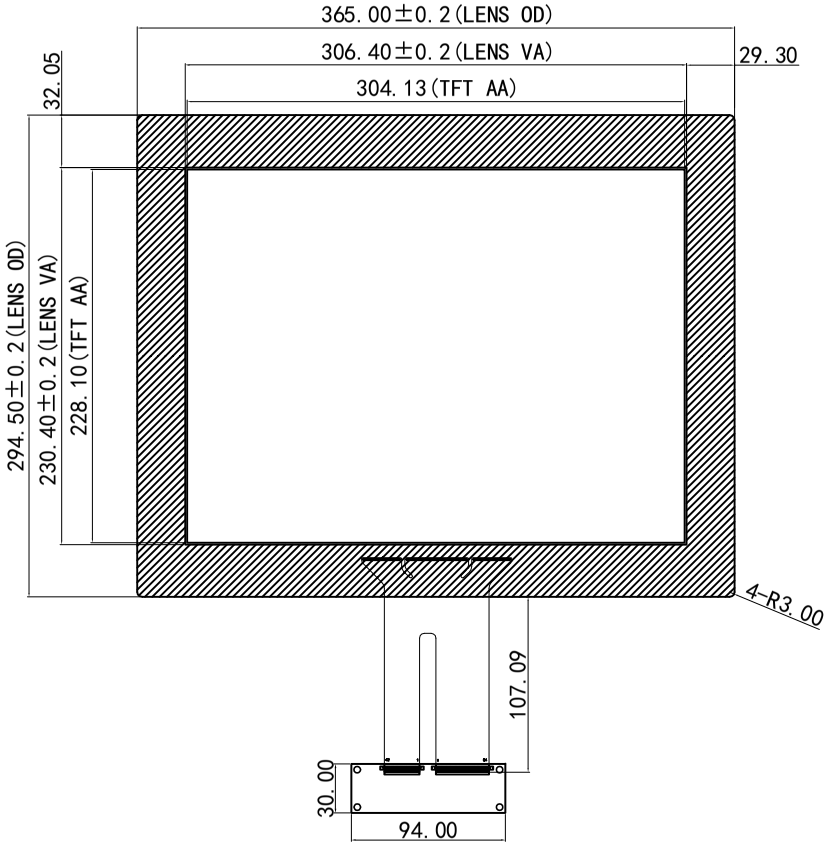

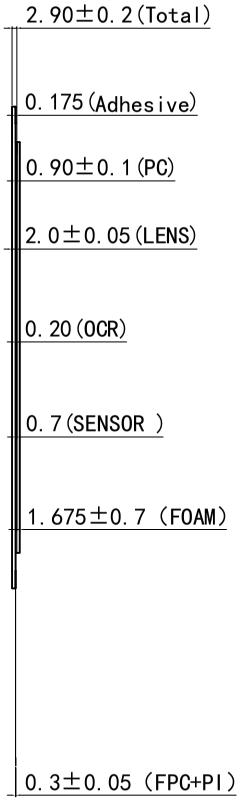

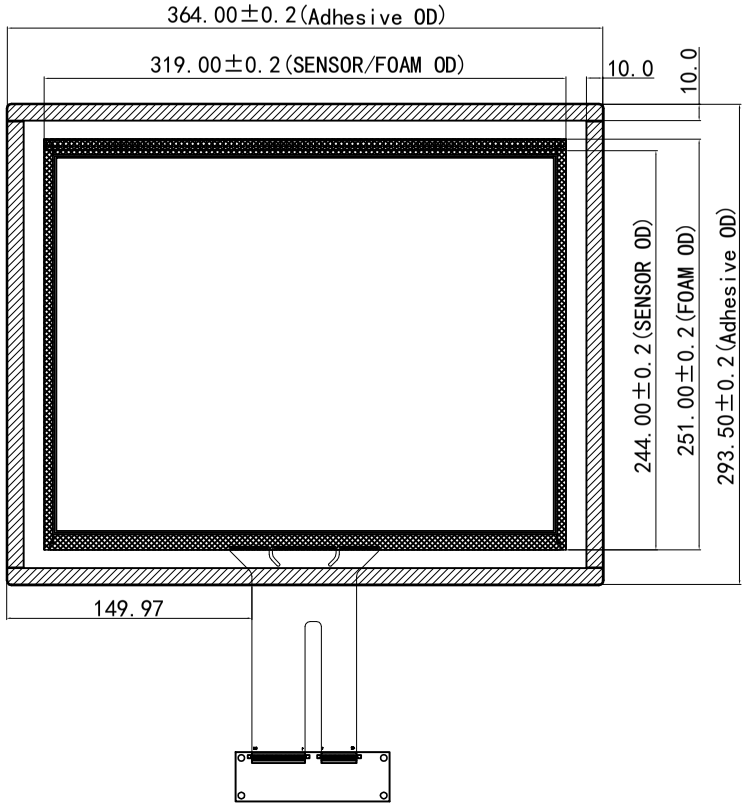

Screen printing area:
Print Black

Front view

Frame Adhesive area :
(3M9495) =0.175mm

Side view

Frame adhesive foam area:
Single-sided tape= 1.675±0.7mm

Back view

Technical parameters			
1. Interfaces:	USB/RS232	7. Humidity range:	45～85%RH
2. Structure :	G+G	8. Transmittance:	≥85%
3. IC solutions:	ILI2302M	9. Surface hardness:	≥6H
4. Impact resistance:	30.0ΦDIA.Steel Ball/132g/Height=35cm/1time	10. Operate :	-20℃～+70℃, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30℃～+80℃, ≤85%RH
6. Power supply:	5V	12. Unmarked dimension tolerance as±0.5	

USB Connector(J1)	
1	VCC(5V)
2	DN
3	DP
4	GND



DETAIL"A"
2:1

杭州宏枭科技有限公司
GraHowlet Technology CO.,Ltd

Model	HX1501802			view direction		Unit	MM
Version	V2.0	Designer	LUO	Date	2018-10-08	Edition	A1
Customer		Approved	HBZ	Date	2018-10-08	Proportion	1:1