


No ROHS hazardous material


Ordinal	Modify content description	Cartographer	Date of change
▲			
▲			

A  
B  
C  
D  
E  
F  
G

A  
B  
C  
D  
E  
F  
G

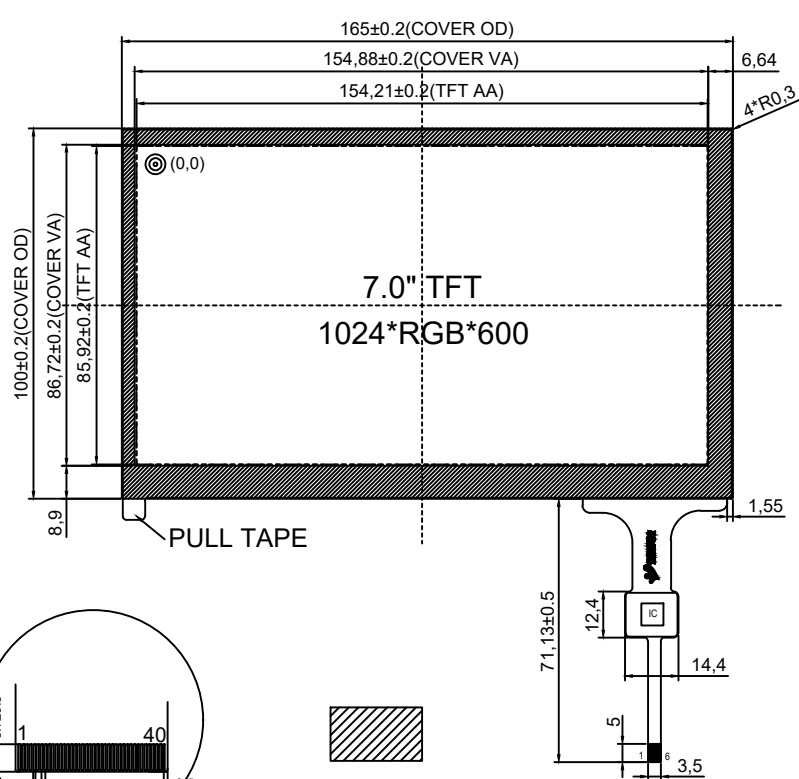


BLACK:RAL9005  
**Front view**

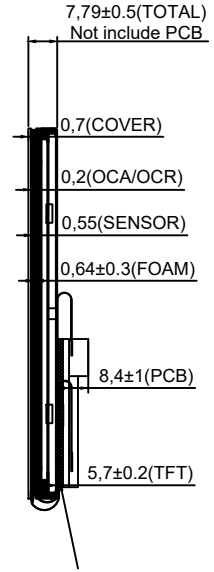


The PCB is fixed to the back of the TFT with double-sided tape, the thickness of the gel is 1.6mm

FOAM:3M5925=0.64mm

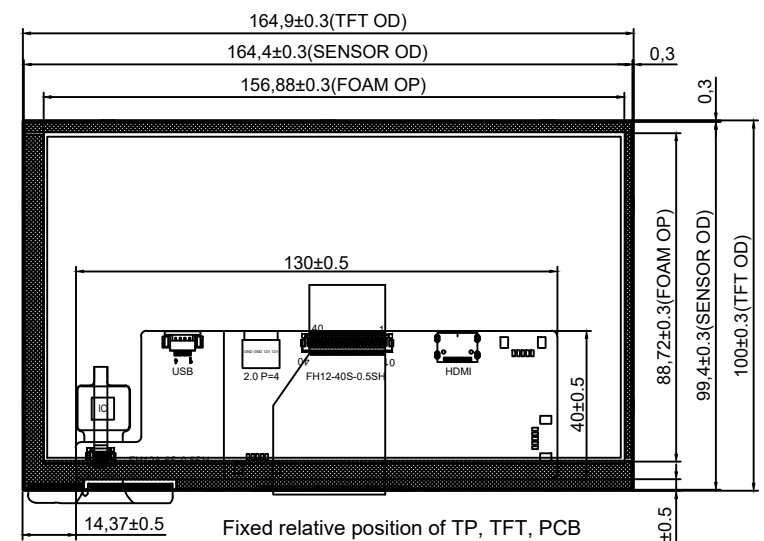

TFT:HX070BT-40L06  
**Back view**



DETAIL "B"  
2:1

TP Technical parameters			
1.Interfaces	I2C	7.Humidity range	45~85%RH
2. Structure	G+G+TFT (AIR bonding)	8.Transmittance	≥85%
3.IC solutions	CYTMA568	9. Hardness	≥6H
4.Impact	30.0ΦDIA.SteelBall /132g/Height=35cm/1time	10. Operate	-20℃~+70℃, ≤85%RH
5.Touch points	10 points	11. Storage	-30℃~+80℃, ≤85%RH
6.Power supply	3.3V	12.Unmarked dimension tolerance	as±0.2

TP	PIN:
1	VCC(3.3V)
2	RST(3.3V)
3	INT(3.3V)
4	SCL(3.3V)
5	SDA(3.3V)
6	GND

		<b>杭州宏梟科技有限公司</b> GraHowlet Technology CO.,Ltd					
		Model	HX0701845		view direction		Unit
Version	V1.0	Designer	LUO	Date	2021-01-22	Edition	A1
Customer		Approved		Date		Proportion	1:1

1 2 3 4 5 6 7 8 9